

# Ordering Information


## EU Manufacturing Catalogue Numbers

Balloon Diameter (mm)	Balloon Working Length (mm)						
	8	10	12	15	18	22	26
1.5	215-084-5	215-104-5	215-124-5	215-154-5	215-184-5	-	-
1.75	217-084-5	217-104-5	217-124-5	217-154-5	217-184-5	-	-
2.0	220-084-5	220-104-5	220-124-5	220-154-5	220-184-5	-	-
2.25	222-084-5	222-104-5	222-124-5	222-154-5	222-184-5	-	-
2.5	225-084-5	225-104-5	225-124-5	225-154-5	225-184-5	225-224-5	225-264-5
2.75	227-084-5	227-104-5	227-124-5	227-154-5	227-184-5	227-224-5	227-264-5
2.875	228-084-5	228-104-5	228-124-5	228-154-5	228-184-5	-	-
3.0	230-084-5	230-104-5	230-124-5	230-154-5	230-184-5	230-224-5	230-264-5
3.25	232-084-5	232-104-5	232-124-5	232-154-5	232-184-5	232-224-5	232-264-5
3.5	235-084-5	235-104-5	235-124-5	235-154-5	235-184-5	235-224-5	235-264-5
3.75	237-084-5	237-104-5	237-124-5	237-154-5	237-184-5	237-224-5	237-264-5
4.0	240-084-5	240-104-5	240-124-5	240-154-5	240-184-5	240-224-5	240-264-5
4.5	245-084-5	245-104-5	245-124-5	245-154-5	245-184-5	245-224-5	245-264-5
5.0	250-084-5	250-104-5	250-124-5	250-154-5	250-184-5	250-224-5	250-264-5

## Compliance Chart

Pressure (atm)	Balloon Diameter (mm)														
	1.50	1.75	2.0	2.25	2.5	2.75	2.875	3.0	3.25	3.5	3.75	4.0	4.5	5.0	
6	1.43	1.69	1.93	2.17	2.42	2.66	2.78	2.90	3.13	3.38	3.60	3.86	4.31	4.80	
8	1.45	1.70	1.95	2.19	2.44	2.68	2.80	2.93	3.16	3.41	3.64	3.90	4.36	4.85	
10	1.47	1.72	1.96	2.21	2.46	2.70	2.83	2.95	3.19	3.44	3.68	3.93	4.41	4.90	
12	1.48	1.73	1.98	2.23	2.48	2.73	2.85	2.98	3.22	3.47	3.71	3.97	4.45	4.95	
14 NOM*	1.50	1.75	2.00	2.25	2.50	2.75	2.875	3.00	3.25	3.50	3.75	4.00	4.50	5.00	
16	1.52	1.77	2.02	2.27	2.52	2.77	2.90	3.02	3.28	3.53	3.79	4.03	4.55	5.05	
18	1.53	1.78	2.04	2.29	2.54	2.80	2.92	3.05	3.31	3.56	3.82	4.07	4.59	5.10	
20 (RBP)**	1.55	1.80	2.05	2.31	2.56	2.82	2.95	3.07	3.34	3.59	3.86	4.10	4.64	5.15	
22 (RBP)**	1.57	1.81	2.07	2.33	2.58	2.84	2.97	3.10	3.37	3.62	3.90	4.14	4.69	5.20	
24 (RBP)**	1.58	1.83	2.09	2.35	2.60	2.86	2.99	3.12	3.40	3.65	3.93	4.17	4.73	5.25	
26	1.60	1.84	2.11	2.37	2.62	2.89	3.02	3.15	3.43	3.67	3.97	4.21	-	-	
28	1.62	1.86	2.12	2.39	2.64	2.91	3.04	3.17	3.46	3.70	-	-	-	-	

\* Nominal Pressure. The nominal in vitro device specifications do not take into account any lesion resistance.  
 \*\* Rated Burst Pressure. Do not exceed RBP

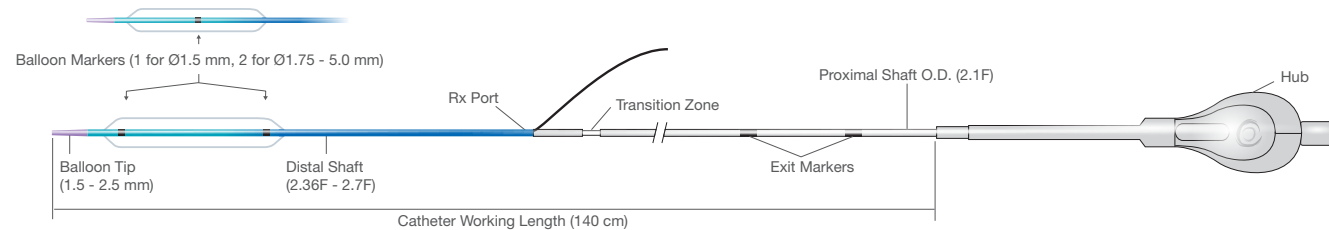

For more information please visit our website at [www.OrbusNeich.com](http://www.OrbusNeich.com) or contact us:

### CORPORATE HEADQUARTERS

3/F, Building 20E  
 Hong Kong Science Park  
 Shatin, N.T., Hong Kong  
 Phone +852.2802.2288  
 Fax +852.2507.3532

### EMEA HEADQUARTERS

Drs. W. van Royenstraat 5  
 3871 AN Hoevelaken  
 The Netherlands  
 Phone +31.33.254.1150 Toll Free Phone 00800.0254.1150\*

\* Only for Belgium, Denmark, France, Germany, Ireland, Netherlands, Norway, Sweden and UK

©2020 ORBUSNEICH Medical Corporation or its affiliates. All rights reserved.

Not available for sale in the USA.


G-70-1069 Rev04

SAPPHIRE and ORBUSNEICH are registered Trademarks of OrbusNeich Medical Corporation.  
 All data and photos on file. Illustrations are not to be considered as engineering drawings or photos.



# NC SAPPHIRE<sup>®</sup> Coronary Dilatation Catheter 24

*Engineered for true controlled compliance,  
high pressure tolerance and re-crossability*

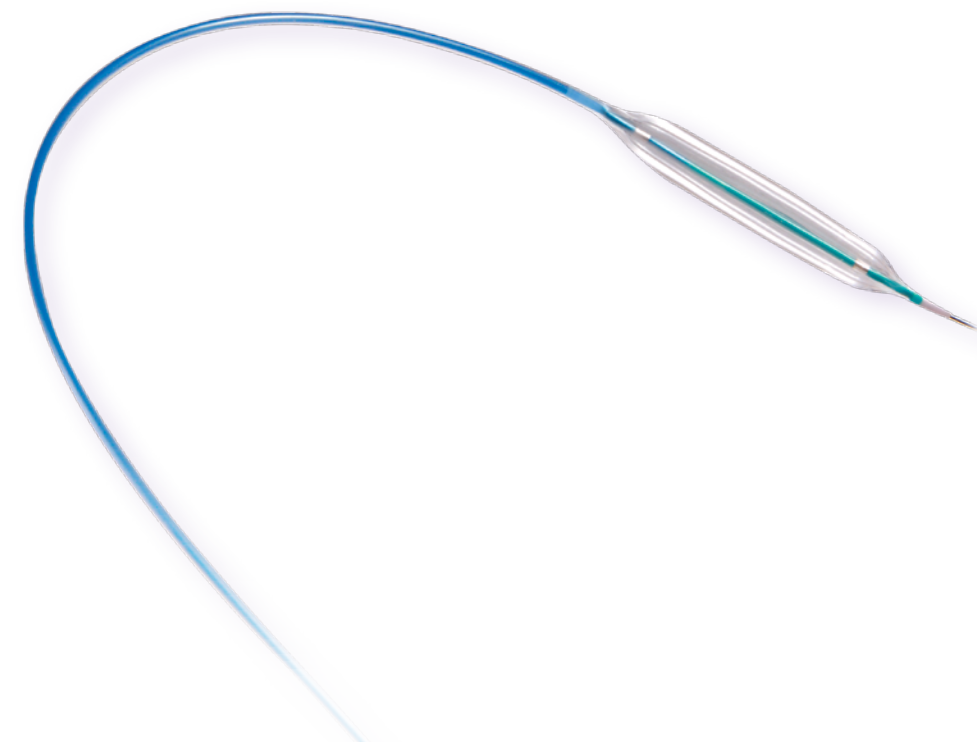

Introducing  
**24 atm RBP**




# Sapphire NC24 offers a complete balance for true controlled compliance, high pressure tolerance and re-crossability

**Controlled Balloon Compliance** for most accurate sizing and stent optimization


**RBP at 24 atm** for high pressure tolerance

New **1.5 mm** diameter and **22 mm & 26 mm** lengths for broader range of vessel treatment


Lowest % Circumferential Growth\* (Nom to RBP)

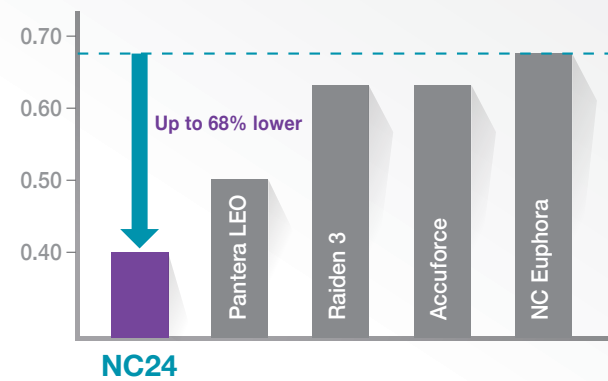


Lowest % Longitudinal Growth\* (Nom to RBP)

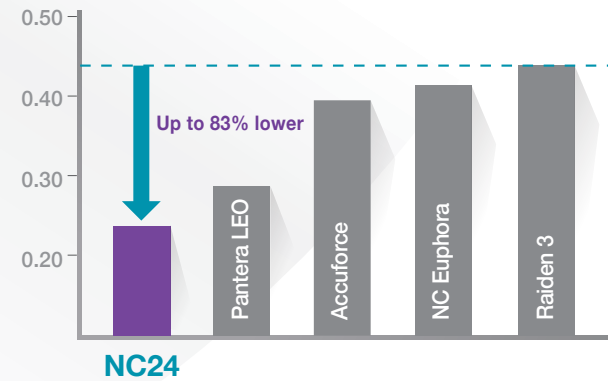


Rated Burst Pressure\* (atm)

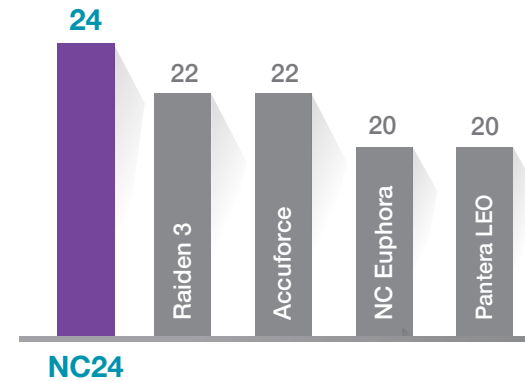


Broad range of balloon diameters and working lengths

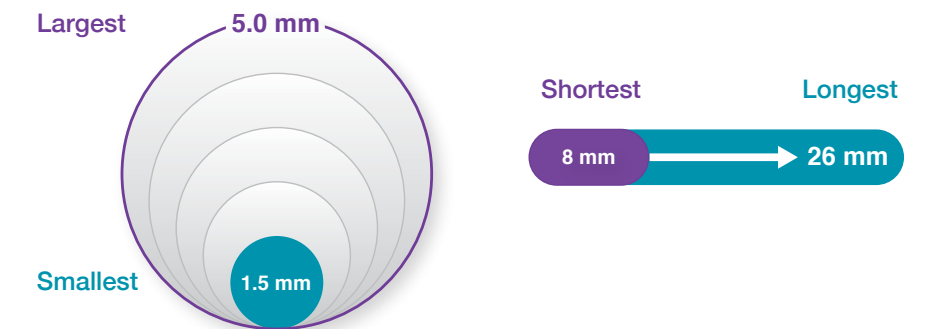

\*Data on file based on Ø 3.0mm balloons

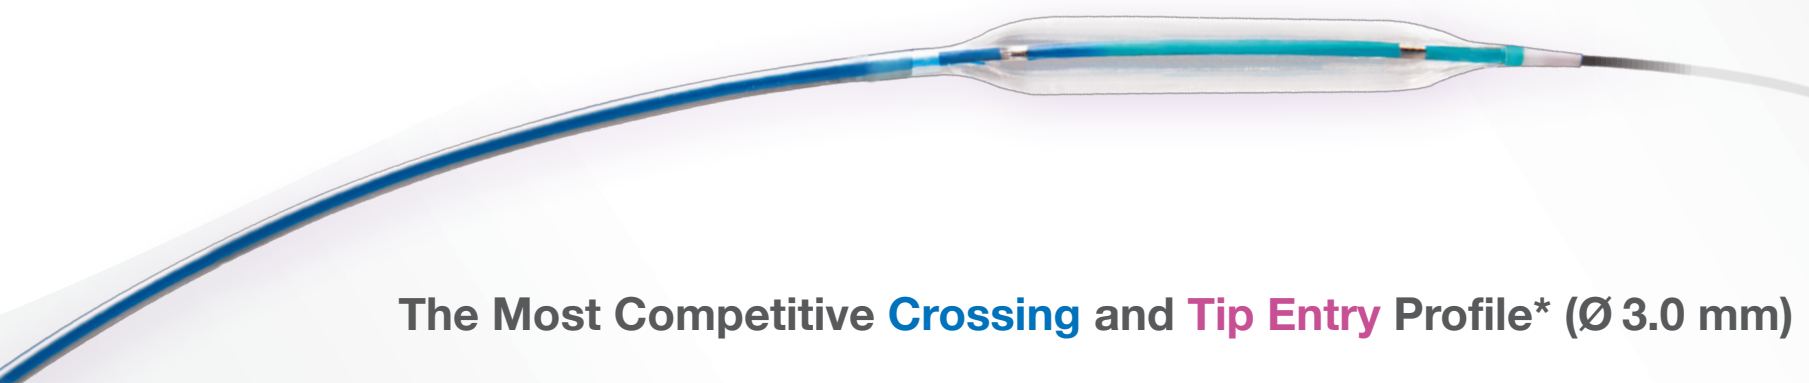

The Most Competitive **Crossing** and **Tip Entry Profile\*** (Ø 3.0 mm)

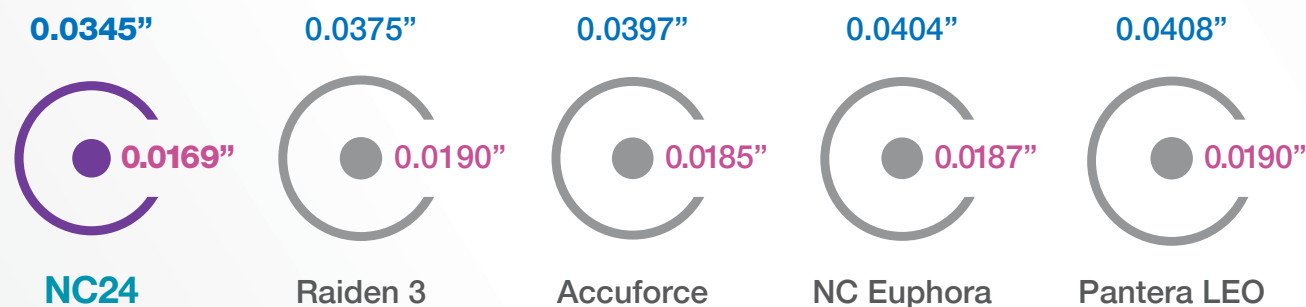

\* Data on file.

## Technical Specifications

Proximal Shaft	2.1F
Distal Shaft	2.36 - 2.7F (Ø1.5 - 5.0 mm)
Catheter Working Length	140 cm
Tip Length	1.5 mm - 2.5 mm (Ø1.5 - 5.0 mm)
Marker Bands	1 (Ø1.5 mm), 2 (Ø1.75 - 5.0 mm)
Balloon Folds	3 (Ø1.5 - 3.0 mm), 5 (Ø3.25 - 5.0 mm)
Coating	<ul style="list-style-type: none"> <li>Hydrophilic (tip to guidewire exit port)</li> <li>Hydrophobic (guidewire lumen)</li> </ul>
Nominal Pressure	14 atm
Rated Burst Pressure	24 atm (Ø1.5 - 3.5 mm), 22 atm (Ø3.75 - 4.0 mm), 20 atm (Ø4.5 - 5.0 mm)